
Product Data Sheet Item No. 915R

PVC-Coated Polyester Netting 2.00 x 25.00 m

Schutznetze24 GmbH Weyerberg 5, DE-35614 Aßlar-Berghausen Phone: +49 (0) 6443 - 436 96 40 Maii: office@safetynet365.com Web: www.safetynet365.com





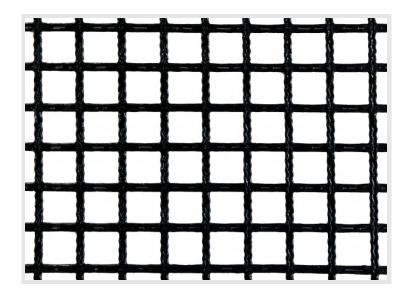

| TECHNICAL DATA | |
|--|---|
| Available Colors | black |
| Dimensions | 2.00 x 25.00 m |
| Material | polyester, coated with PVC |
| Material Diameter | Ø 3.0 mm |
| Mesh Size | 20 x 20 mm |
| Pose of Meshs | quadratic (square) |
| Edge Design | without edge |
| Continuous Operating Temperature | -25 to +60 °C |
| Melting Point | 180 °C |
| Yarn Moisture Regain | 0% |
| Tensile Strength Reduction Because Of Moisture | 0% |
| Resistance to Weak/Strong Acids | good/not good |
| Resistance to Weak/Strong Alkalis | good/not good |
| Resistance to Organic Solvents | not good |
| Resistance to Benzine and Greases | very good |
| Bending Strength & Abrasion Resistance | very good |
| Weather-Resistance | good |
| UV-Resistance | 300 kly |
| Elasticity After Years of Climatic Influences | good long-term flexibility, no elongation |
| Flexibility When Used in Water | stays flexible |
| Contraction When Used in Water | no contraction |
| Contraction When Used Outside | no contraction |
| Behavior in High Heat / Fire | melting |
| Electrical Characteristics | isolating, no electrical conductivity |
| | |

| Customs Tariff No. | 56081930 |
|--------------------|----------|
| Area Density | 800 g/m² |
| Total Weight | 40.00 kg |