


Product Data Sheet Item No. 915R

PVC-Coated Polyester Netting 2.00 x 25.00 m

Schutznetze24 GmbH
Weyerberg 5, DE-35614 Aßlar-Berghausen
Phone: +49 (0) 6443 - 436 96 40
Mail: office@safetynet365.com
Web: www.safetynet365.com

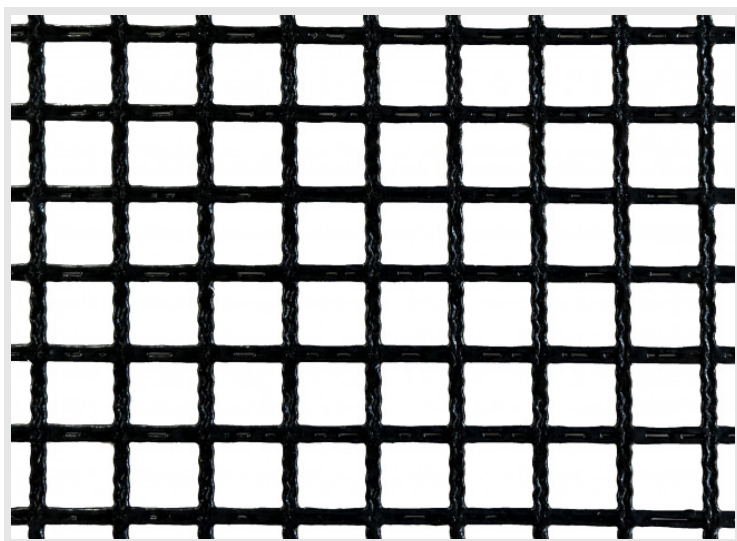

TECHNICAL DATA

Available Colors	black
Dimensions	2.00 x 25.00 m
Material	polyester, coated with PVC
Material Diameter	Ø 3.0 mm
Mesh Size	20 x 20 mm
Pose of Meshs	quadratic (square)
Edge Design	without edge
Continuous Operating Temperature	-25 to +60 °C
Melting Point	180 °C
Yarn Moisture Regain	0%
Tensile Strength Reduction Because Of Moisture	0%
Resistance to Weak/Strong Acids	good/not good
Resistance to Weak/Strong Alkalis	good/not good
Resistance to Organic Solvents	not good
Resistance to Benzine and Greases	very good
Bending Strength & Abrasion Resistance	very good
Weather-Resistance	good
UV-Resistance	300 kly
Elasticity After Years of Climatic Influences	good long-term flexibility, no elongation
Flexibility When Used in Water	stays flexible
Contraction When Used in Water	no contraction
Contraction When Used Outside	no contraction
Behavior in High Heat / Fire	melting
Electrical Characteristics	isolating, no electrical conductivity

Customs Tariff No.	56081930
Area Density	800 g/m ²
Total Weight	40.00 kg