


Product Data Sheet Item No. SN-01651-025

Luggage Net with Steel Frame, Close-meshed

Schutznetze24 GmbH
Weyerberg 5, DE-35614 Aßlar-Berghausen
Phone: +49 (0) 6443 - 436 96 40
Mail: office@safetynet365.com
Web: www.safetynet365.com

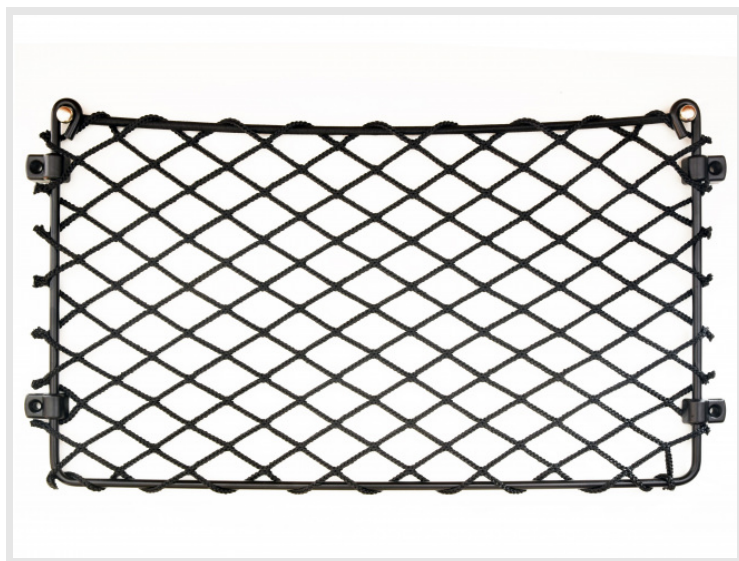

TECHNICAL DATA

| | |
|---|--|
| Material | polyester, knotless, powder-coated steel frame, polyamide screw-on brackets |
| Material Diameter | Ø 2.5 mm |
| Mesh Size | 25 x 25 mm |
| Pose of Meshs | rhombic (diamond mesh) |
| Mesh Connection | knotless braid |
| Edge Design | adjustable screw-on brackets with screw holes (Ø 4 mm), steel frame (Ø 5 mm, black powder-coated), shock cord (Ø 5 mm, latex core, polyester cover) attached to the upper edge |
| Certificate | Oeko-Tex®; certificate 1904052 |
| Continuous Operating Temperature | -40 to +100 °C |
| Melting Point | 260 °C |
| Yarn Moisture Regain | 0.5 to 2.0% |
| Tensile Strength Reduction Because Of Moisture | 0% |
| Resistance to Weak/Strong Acids | good/not good |
| Resistance to Weak/Strong Alkalis | good/good |
| Resistance to Organic Solvents | good |
| Resistance to Benzine and Greases | good |
| Bending Strength & Abrasion Resistance | good |
| Weather-Resistance | good |
| Tensile Strength After Two Years of Climatic Influences | 90% |
| Elasticity After Years of Climatic Influences | good long-term flexibility, little elongation |
| Flexibility When Used in Water | stays flexible |
| Contraction When Used in Water | low contraction |
| Contraction When Used Outside | no contraction |

| | |
|-------------------------------------|---|
| Behavior in High Heat / Fire | melting |
| Included Parts | luggage net on steel frame, 4 screw-on brackets |
| Customs Tariff No. | 56081930 |
| Total Weight | 0.00 kg |