
## Product Data Sheet Item No. SN-016606

Luggage Net 300 x 400 mm, grey

Schutznetze24 GmbH Weyerberg 5, DE-35614 Aßlar-Berghausen Phone: +49 (0) 6443 - 436 96 40 Maii: office@safetynet365.com Web: www.safetynet365.com





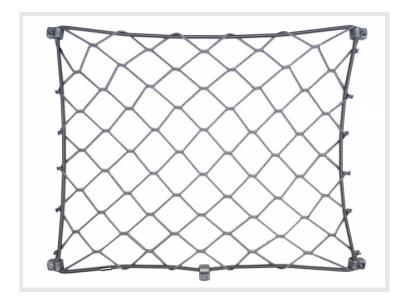



Available Colors         grey           Material         high tenacity polypropylene, knotiless, polyamide screw-on brackets           Material Diameter         22.5 mm           Mesh Size         40 x 40 mm           Pose of Meshs         hombic (diamond mesh)           Mesh Connection         knotiles braid           Edge Design         adjustable screw-on brackets with screw holes (Ø 4 mm), shock cord (Ø 5 mm, latex core, holyester cover), threaded all the way round           Continuous Operating Temperature         20 co-Tex® certificate 1904052           Weshing Temperature (max.)         30 °C           Van Moisture Regain         90 °C           Resistance to Weak/Strong Acids         very good/good           Resistance to Weak/Strong Aklatis         good/not good           Resistance to Organic Solvents         good           Beding Strength & Abrasion Resistance         good           Weather-Resistance         good           Beding Strength & Abrasion Resistance         good           Catality After Years of Climatic Influences         good long-term flexibility, little elongation           Februality When Used in Water         stays flexible	TECHNICAL DATA	
Material Diameter	Available Colors	grey
Mesh Size 40 x 40 mm  Pose of Meshs rhombic (diamond mesh)  Mesh Connection knotless braid  Edge Design adjustable screw-on brackets with screw holes (Ø 4 mm), shock cord (Ø 5 mm, latex core, polyester cover), threaded all the way round  Certificate Oeko-Tex® certificate 1904052  Continuous Operating Temperature 40 to +80 °C  Melting Point 165 °C  Washing Temperature (max.) 30 °C  Yarn Moisture Regain 9%  Tensile Strength Reduction Because Of Moisture 9%  Resistance to Weak/Strong Acids very good/good  Resistance to Uweak/Strong Alkalis good/not good  Resistance to Organic Solvents good  Bending Strength & Abrasion Resistance 9 good  Weather-Resistance 1 good  Weather-Resistance 99%  Elasticity After Years of Climatic Influences good long-term flexibility, little elongation	Material	high tenacity polypropylene, knotless, polyamide screw-on brackets
Pose of Meshs  Mesh Connection  Edge Design  Adjustable screw-on brackets with screw holes (Ø 4 mm), shock cord (Ø 5 mm, latex core, polyester cover), threaded all the way round  Certificate  Centificate  Continuous Operating Temperature  40 to +80 °C  Melting Point  Mesh Graperature (max.)  30 °C  Yarn Moisture Regain  7ensile Strength Reduction Because Of Moisture  Resistance to Weak/Strong Acids  Resistance to Weak/Strong Alkalis  Resistance to Organic Solvents  Resistance to Benzine and Greases  Bending Strength & Abrasion Resistance  Weather-Resistance  Tensile Strength After Two Years of Climatic Influences  good long-term flexibility, little elongation	Material Diameter	Ø 2.5 mm
Mesh Connection         knotless braid           Edge Design         adjustable screw-on brackets with screw holes (Ø 4 mm), shock cord (Ø 5 mm, latex core, polyester cover), threaded all the way round           Certificate         Oeko-Tex® certificate 1904052           Continuous Operating Temperature         -40 to +80 °C           Melting Point         165 °C           Washing Temperature (max.)         30 °C           Yarn Moisture Regain         0%           Tensile Strength Reduction Because Of Moisture         0%           Resistance to Weak/Strong Acids         very good/good           Resistance to Organic Solvents         good           Resistance to Benzine and Greases         very good           Bending Strength & Abrasion Resistance         good           Weather-Resistance         good           Tensile Strength After Two Years of Climatic Influences         90%           Elsticity After Years of Climatic Influences         good long-term flexibility, little elongation	Mesh Size	40 x 40 mm
Edge Design adjustable screw-on brackets with screw holes (Ø 4 mm), shock cord (Ø 5 mm, latex core, polyester cover), threaded all the way round  Certificate Oeko-Tex® certificate 1904052  Continuous Operating Temperature 40 to +80 °C  Melting Point 165 °C  Washing Temperature (max.) 30 °C  Yarn Moisture Regain 0%  Tensile Strength Reduction Because Of Moisture Resistance to Weak/Strong Acids very good/good  Resistance to Weak/Strong Alkalis good/not good  Resistance to Organic Solvents good  Bending Strength & Abrasion Resistance good  Weather-Resistance  Weather-Resistance good  Tensile Strength After Two Years of Climatic Influences good long-term flexibility, little elongation	Pose of Meshs	rhombic (diamond mesh)
Certificate     Oeko-Tex® certificate 1904052       Continuous Operating Temperature     -40 to +80 °C       Melting Point     165 °C       Washing Temperature (max.)     30 °C       Yarn Moisture Regain     0%       Tensile Strength Reduction Because Of Moisture     0%       Resistance to Weak/Strong Acids     very good/good       Resistance to Weak/Strong Alkalis     good/not good       Resistance to Benzine and Greases     very good       Bending Strength & Abrasion Resistance     good       Weather-Resistance     good       Tensile Strength After Two Years of Climatic Influences     90%       Elasticity After Years of Climatic Influences     good long-term flexibility, little elongation	Mesh Connection	knotless braid
Certificate Oeko-Tex® certificate 1904052 Continuous Operating Temperature -40 to +80 °C  Melting Point 165 °C  Washing Temperature (max.) 30 °C  Yarn Moisture Regain 0% Tensile Strength Reduction Because Of Moisture 0% Resistance to Weak/Strong Acids very good/good  Resistance to Weak/Strong Alkalis good/not good  Resistance to Organic Solvents good  Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  Tensile Strength After Two Years of Climatic Influences good long-term flexibility, little elongation	Edge Design	adjustable screw-on brackets with screw holes (Ø 4 mm), shock cord (Ø 5 mm, latex core,
Continuous Operating Temperature  -40 to +80 °C  Melting Point  165 °C  Washing Temperature (max.)  30 °C  Yarn Moisture Regain  0%  Tensile Strength Reduction Because Of Moisture  Resistance to Weak/Strong Acids  very good/good  Resistance to Weak/Strong Alkalis  good/not good  Resistance to Organic Solvents  Resistance to Benzine and Greases  very good  Bending Strength & Abrasion Resistance  good  Weather-Resistance  good  Tensile Strength After Two Years of Climatic Influences  good long-term flexibility, little elongation		polyester cover), threaded all the way round
Melting Point 165 °C Washing Temperature (max.) 30 °C Yarn Moisture Regain 0% Tensile Strength Reduction Because Of Moisture 0% Resistance to Weak/Strong Acids very good/good Resistance to Weak/Strong Alkalis good/not good Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good Tensile Strength After Two Years of Climatic Influences good long-term flexibility, little elongation	Certificate	Oeko-Tex® certificate 1904052
Washing Temperature (max.)  Yarn Moisture Regain  O%  Resistance to Weak/Strong Acids  Resistance to Weak/Strong Alkalis  Resistance to Organic Solvents  Resistance to Benzine and Greases  Weather-Resistance  Weather-Resistance  Sood  Weather-Resistance  Bending Strength & Abrasion Resistance  Sood  Weather-Resistance  Sood  Bending Strength After Two Years of Climatic Influences  Bending Strength After Two Years of Climatic Influences  Sood Institute elongation	Continuous Operating Temperature	-40 to +80 °C
Yarn Moisture Regain 0%  Tensile Strength Reduction Because Of Moisture 0%  Resistance to Weak/Strong Acids very good/good  Resistance to Weak/Strong Alkalis good/not good  Resistance to Organic Solvents good  Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  Tensile Strength After Two Years of Climatic Influences good long-term flexibility, little elongation	Melting Point	165 °C
Tensile Strength Reduction Because Of Moisture 0%  Resistance to Weak/Strong Acids very good/good  Resistance to Weak/Strong Alkalis good/not good  Resistance to Organic Solvents good  Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  Tensile Strength After Two Years of Climatic Influences good long-term flexibility, little elongation	Washing Temperature (max.)	30 °C
Resistance to Weak/Strong Alkalis good/not good  Resistance to Organic Solvents good  Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  Tensile Strength After Two Years of Climatic Influences good long-term flexibility, little elongation	Yarn Moisture Regain	0%
Resistance to Weak/Strong Alkalis good/not good  Resistance to Organic Solvents good  Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  Tensile Strength After Two Years of Climatic Influences good long-term flexibility, little elongation	Tensile Strength Reduction Because Of Moisture	0%
Resistance to Organic Solvents good  Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  Tensile Strength After Two Years of Climatic Influences good long-term flexibility, little elongation	Resistance to Weak/Strong Acids	very good/good
Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  Tensile Strength After Two Years of Climatic Influences good long-term flexibility, little elongation	Resistance to Weak/Strong Alkalis	good/not good
Bending Strength & Abrasion Resistance good  Weather-Resistance good  Tensile Strength After Two Years of Climatic Influences 90%  Elasticity After Years of Climatic Influences good long-term flexibility, little elongation	Resistance to Organic Solvents	good
Weather-Resistance good  Tensile Strength After Two Years of Climatic Influences 90%  Elasticity After Years of Climatic Influences good long-term flexibility, little elongation	Resistance to Benzine and Greases	very good
Tensile Strength After Two Years of Climatic Influences 90%  Elasticity After Years of Climatic Influences good long-term flexibility, little elongation	Bending Strength & Abrasion Resistance	good
Elasticity After Years of Climatic Influences good long-term flexibility, little elongation	Weather-Resistance	good
	Tensile Strength After Two Years of Climatic Influences	90%
Flexibility When Used in Water stays flexible	Elasticity After Years of Climatic Influences	good long-term flexibility, little elongation
	Flexibility When Used in Water	stays flexible

Contraction When Used in Water	low contraction
Contraction When Used Outside	no contraction
Behavior in High Heat / Fire	melting
Included Parts	luggage net, rubber cord, 4 or 5 screw-on brackets (depending on size), fastener for rubber cord
Customs Tariff No.	56081930
Total Weight	0.06 kg