


Product Data Sheet Item No. 200F020

Safety Net, flame-retardant, by the m²
(Custom-Made)

Schutzenetz24 GmbH
Weyerberg 5, DE-35614 Aßlar-Berghausen
Phone: +49 (0) 6443 - 436 96 40
Mail: office@safetynet365.com
Web: www.safetynet365.com

SCHUTZNETZE
24

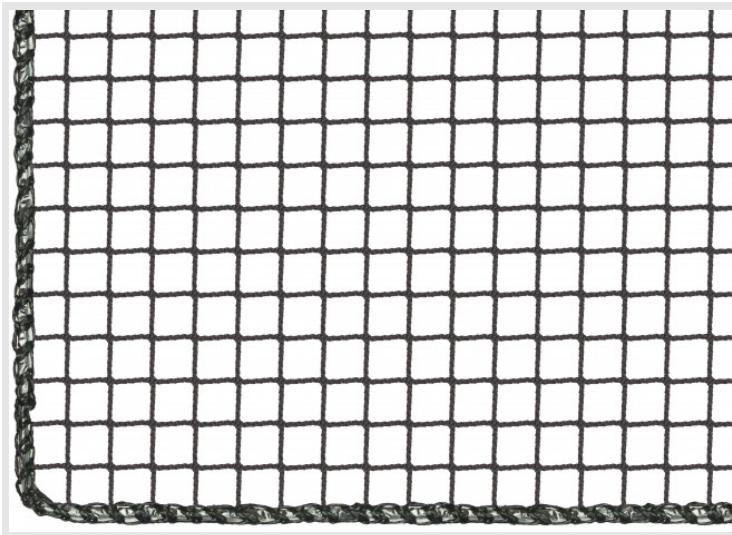

**STANDARD
100**
12.0.02466
Hohenstein HTTI

TECHNICAL DATA

Available Colors	white, black
Material	high tenacity polypropylene, knotless, flame-retardant
Material Diameter	Ø 2.3 mm
Mesh Size	20 x 20 mm
Pose of Meshes	quadratic (square)
Mesh Connection	knotless braid
Edge Design	reinforced selvage cord of approx. 7 mm
Max. Tensile Strength of a Mesh	800 N
Tensile Breaking Force Referred to Density	7.0 cN/den
Breaking Elongation of Filament	15%
Standards and Rules	EN 13501-1 (flame-retarding), classification B-s1 d2, DIN 4102 (B1, flame-retarding)
Certificate	MPA-Bau certification report P-NDS04-851, Oeko-Tex®; certificate 12.0.02466
Continuous Operating Temperature	-40 to +80 °C
Melting Point	165 °C
Washing Temperature (max.)	30 °C
Yarn Moisture Regain	0%
Tensile Strength Reduction Because Of Moisture	0%
Resistance to Weak/Strong Acids	very good/good
Resistance to Weak/Strong Alkalies	good/not good
Resistance to Organic Solvents	good
Resistance to Benzene and Greases	very good
Bending Strength & Abrasion Resistance	good
Weather-Resistance	good
UV-Resistance	300 kly

Tensile Strength After Two Years of Climatic Influences	90%
Elasticity After Years of Climatic Influences	good long-term flexibility, little elongation
Flexibility When Used in Water	stays flexible
Contraction When Used in Water	low contraction
Contraction When Used Outside	no contraction
Behavior in High Heat / Fire	melting
Electrical Characteristics	isolating, no electrical conductivity
Customs Tariff No.	56081930
Area Density	180 g/m ²