
Product Data Sheet Item No. 200-020

Net by the m² (Custom-Made)

Schutznetze24 GmbH Weyerberg 5, DE-35614 Aßlar-Berghausen Phone: +49 (0) 6443 - 436 96 40 Maii: office@safetynet365.com Web: www.safetynet365.com





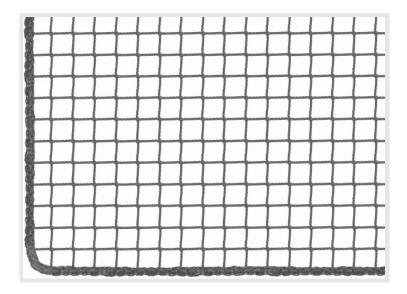



Available Colors geen, dark green, white, blue, black, anthractie Material high tenacity polypropylene, knotless Material Diameter 20.3 mm Mesh Size 20.2 0 mm Pose of Meshs undratic (square) Mesh Connection knotless braid Edge Design reinforced selvage cord of approx. 7 mm Max. Tensile Strength of a Mesh 80 N Tensile Brasking Force Referred to Density 7.0 Nividen Certificate 0 Neo-Tex-Kreg; certificate 12.0.02466 Chilinous Operating Temperature 40 to +80 °C Mathing Temperature (max.) 30 °C Van Moisture Regain 0 °C Tensile Strength Reduction Because of Moisture 90 °C Resistance to Weak/Strong Akidais 90 color good/good Resistance to Weak/Strong Akidais 90 color good Resistance to Denzine and Grease 90 color good Beding Strength & Abrasion Resistance 90 color good Weather-Resistance 90 color Weather-Resistance 90 color Weather-Resistance 90 color Weather-Resistance 90 color	TECHNICAL DATA	
Material Diameter Ø 2.3 mm Mesh Size 20 x 20 mm Pose of Meshs quadratic (square) Mesh Connection knotless braid Edge Design reinforced selvage cord of approx. 7 mm Max. Tensile Strength of a Mesh 800 N Tensile Breaking Force Referred to Density 7.0 cN/den Breaking Elongation of Filament 15% Certificate Oeko-Tex® certificate 12.0.02466 Continuous Operating Temperature 40 to +80 °C Washing Temperature (max.) 30 °C Varn Moisture Regain 0% Tensile Strength Reduction Because Of Moisture 0% Resistance to Weak/Strong Acids very good/good Resistance to Weak/Strong Alkalis good/not good Resistance to Organic Solvents good Bending Strength & Abrasion Resistance good Weather-Resistance good Weather-Resistance good	Available Colors	green, dark green, white, blue, black, anthracite
Pose of Meshs Pose of Meshs Mesh Connection Redge Design Max. Tensile Strength of a Mesh Reaking Elongation of Filament Reaking Force Referred to Density Reaking Elongation of Filament Reaking Elongation of Filament Reaking Elongation of Filament Reaking Elongation of Filament Resking Elongation of Filament Resking Elongation of Filament Resking Elongation of Filament Resking Force Resking Temperature Resking Point Resistance to Mesk/Strong Acids Resistance to Weak/Strong Acids Resistance to Weak/Strong Alkalis Resistance to Organic Solvents Resistance to Organic Solvents Resistance to Benzine and Greases Resistance to Benzine and Greases Resistance	Material	high tenacity polypropylene, knotless
Pose of Meshs Mesh Connection knotless braid Edge Design reinforced selvage cord of approx. 7 mm Max. Tensile Strength of a Mesh 800 N Tensile Breaking Force Referred to Density 7.0 cN/den Breaking Elongation of Filament 15% Certificate Oeko-Tex® certificate 12.0.02466 Continuous Operating Temperature 40 to +80 °C Melting Point 165 °C Washing Temperature (max.) 30 °C Yarn Moisture Regain 70% Resistance to Weak/Strong Acids very good/good Resistance to Organic Solvents Qood Resistance to Organic Solvents Sendang Strength & Abrasion Resistance 9000 Weather-Resistance 9000 Weat	Material Diameter	Ø 2.3 mm
Mesh Connection knotless braid Edge Design reinforced selvage cord of approx. 7 mm Max. Tensile Strength of a Mesh 800 N Tensile Breaking Force Referred to Density 7.0 cN/den Breaking Elongation of Filament 15% Cortificate Oeko-Tex® certificate 12.0.02466 Continuous Operating Temperature 40 to +80 °C Melting Point 165 °C Washing Temperature (max.) 30 °C Yarn Moisture Regain 0% Resistance to Weak/Strong Acids very good/good Resistance to Weak/Strong Acids good/not good Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good Uvery Gestance Good	Mesh Size	20 x 20 mm
Edge Design reinforced selvage cord of approx. 7 mm Max. Tensile Strength of a Mesh 800 N Tensile Breaking Force Referred to Density 7.0 cN/den Breaking Elongation of Filament 15% Certificate 0eko-Tex® certificate 12.0.02466 Continuous Operating Temperature 40 to +80 °C Melting Point 165°C Washing Temperature (max.) 30°C Yarn Moisture Regain 0% Tensile Strength Reduction Because Of Moisture 0% Resistance to Weak/Strong Acids very good/good Resistance to Uweak/Strong Alkalis good/not good Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good good Weather-Resistance good Weath	Pose of Meshs	quadratic (square)
Max. Tensile Strength of a Mesh 800 N Tensile Breaking Force Referred to Density 7.0 cN/den Breaking Elongation of Filament 15% Certificate Oeko-Tex® certificate 12.0.02466 Continuous Operating Temperature -40 to +80 °C Melting Point 165 °C Washing Temperature (max.) 30 °C Yarn Moisture Regain 0% Tensile Strength Reduction Because Of Moisture 0% Resistance to Weak/Strong Acids very good/good Resistance to Weak/Strong Alkalis good/not good Resistance to Organic Solvents good Bending Strength & Abrasion Resistance good Weather-Resistance good Uv-Resistance 300 kly	Mesh Connection	knotless braid
Tensile Breaking Force Referred to Density 7.0 cN/den Breaking Elongation of Filament 15% Certificate Oeko-Tex® certificate 12.0.02466 Continuous Operating Temperature -40 to +80 °C Melting Point 165 °C Washing Temperature (max.) 30 °C Yarn Moisture Regain 0% Tensile Strength Reduction Because Of Moisture 0% Resistance to Weak/Strong Acids very good/good Resistance to Weak/Strong Alkalis good/not good Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good Weather-Resistance 300 kly	Edge Design	reinforced selvage cord of approx. 7 mm
Breaking Elongation of Filament 15% Certificate Oeko-Tex® certificate 12.0.02466 Continuous Operating Temperature -40 to +80 °C Melting Point 165 °C Washing Temperature (max.) 30 °C Yarn Moisture Regain 0% Tensile Strength Reduction Because Of Moisture 0% Resistance to Weak/Strong Acids very good/good Resistance to Weak/Strong Alkalis good/not good Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good UV-Resistance 300 kly	Max. Tensile Strength of a Mesh	800 N
Certificate Oeko-Tex® certificate 12.0.02466 Continuous Operating Temperature -40 to +80 °C Melting Point 165 °C Washing Temperature (max.) 30 °C Yarn Moisture Regain 0% Tensile Strength Reduction Because Of Moisture 0% Resistance to Weak/Strong Acids very good/good Resistance to Weak/Strong Alkalis good/not good Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good Uv-Resistance 300 kly	Tensile Breaking Force Referred to Density	7.0 cN/den
Continuous Operating Temperature -40 to +80 °C Melting Point 165 °C Washing Temperature (max.) 30 °C Yarn Moisture Regain 0% Tensile Strength Reduction Because Of Moisture Resistance to Weak/Strong Acids Resistance to Weak/Strong Alkalis good/not good Resistance to Organic Solvents Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good Uv-Resistance 300 kly	Breaking Elongation of Filament	15%
Melting Point 165 °C Washing Temperature (max.) 30 °C Yarn Moisture Regain 0% Tensile Strength Reduction Because Of Moisture 0% Resistance to Weak/Strong Acids very good/good Resistance to Weak/Strong Alkalis good/not good Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good UV-Resistance 300 kly	Certificate	Oeko-Tex® certificate 12.0.02466
Washing Temperature (max.) Yarn Moisture Regain O% Resistance to Weak/Strong Acids Resistance to Weak/Strong Alkalis Resistance to Organic Solvents Resistance to Organic Solvents Resistance to Benzine and Greases Weather-Resistance UV-Resistance 300 kly	Continuous Operating Temperature	-40 to +80 °C
Yarn Moisture Regain 0% Tensile Strength Reduction Because Of Moisture 0% Resistance to Weak/Strong Acids very good/good Resistance to Weak/Strong Alkalis good/not good Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good UV-Resistance 300 kly	Melting Point	165 °C
Tensile Strength Reduction Because Of Moisture 0% Resistance to Weak/Strong Acids very good/good Resistance to Weak/Strong Alkalis good/not good Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good UV-Resistance 300 kly	Washing Temperature (max.)	30 °C
Resistance to Weak/Strong Acids Resistance to Weak/Strong Alkalis good/not good Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good UV-Resistance 300 kly	Yarn Moisture Regain	0%
Resistance to Weak/Strong Alkalis good/not good Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good UV-Resistance 300 kly	Tensile Strength Reduction Because Of Moisture	0%
Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good UV-Resistance 300 kly	Resistance to Weak/Strong Acids	very good/good
Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good Weather-Resistance good UV-Resistance 300 kly	Resistance to Weak/Strong Alkalis	good/not good
Bending Strength & Abrasion Resistance good Weather-Resistance good UV-Resistance 300 kly	Resistance to Organic Solvents	good
Weather-Resistance good UV-Resistance 300 kly	Resistance to Benzine and Greases	very good
UV-Resistance 300 kly	Bending Strength & Abrasion Resistance	good
	Weather-Resistance	good
Tensile Strength After Two Years of Climatic Influences 90%	UV-Resistance	300 kly
	Tensile Strength After Two Years of Climatic Influences	90%

Elasticity After Years of Climatic Influences	good long-term flexibility, little elongation
Flexibility When Used in Water	stays flexible
Contraction When Used in Water	low contraction
Contraction When Used Outside	no contraction
Behavior in High Heat / Fire	melting
Electrical Characteristics	isolating, no electrical conductivity
Customs Tariff No.	56081930
Area Density	180 g/m²