
Product Data Sheet Item No. 2062-130-04

Lifting Net 3.30 x 3.30 m

Schutznetze24 GmbH Weyerberg 5, DE-35614 Aßlar-Berghausen Phone: +49 (0) 6443 - 436 96 40 Maii: office@safetynet365.com Web: www.safetynet365.com





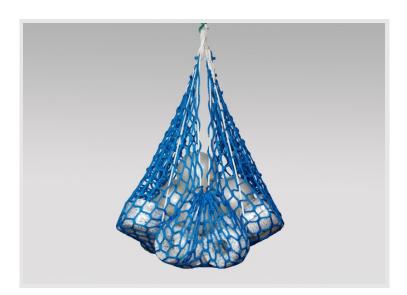

TECHNICAL DATA	
Available Colors	blue
Dimensions	3.30 x 3.30 m
Material	high tenacity polypropylene, knotless
Material Diameter	Ø 15.0 mm
Mesh Size	130 x 130 mm
Pose of Meshs	rhombic (diamond mesh)
Mesh Connection	knotless braid
Edge Design	with edged rope, with two cross ropes through the net (PA \varnothing 14 mm), incl. loops with scuff
	protection on the corners
Edged Rope	nylon rope (Ø 14 mm, white), all around
Max. Tensile Strength of a Mesh	8300 N
Breaking Elongation of Filament	15%
Payload	3 tons
Standards and Rules	EN 1263-1
Certificate	Oeko-Tex® certificate 12.0.02466
Continuous Operating Temperature	-40 to +80 °C
Melting Point	165 °C
Washing Temperature (max.)	30 °C
Yarn Moisture Regain	0%
Tensile Strength Reduction Because Of Moisture	0%
Resistance to Weak/Strong Acids	very good/good
Resistance to Weak/Strong Alkalis	good/not good
Resistance to Organic Solvents	good
Resistance to Benzine and Greases	very good

Bending Strength & Abrasion Resistance	good
Weather-Resistance	good
UV-Resistance	300 kly
Tensile Strength After Two Years of Climatic Influences	90%
Elasticity After Years of Climatic Influences	good long-term flexibility, little elongation
Flexibility When Used in Water	stays flexible
Contraction When Used in Water	low contraction
Contraction When Used Outside	no contraction
Behavior in High Heat / Fire	melting
Electrical Characteristics	isolating, no electrical conductivity
Customs Tariff No.	56081930
Area Density	1150 g/m²
Total Weight	15.70 kg