


Product Data Sheet Item No. 2062-130-04

Lifting Net 3.30 x 3.30 m

Schutzenetz24 GmbH
Weyerberg 5, DE-35614 Aßlar-Berghausen
Phone: +49 (0) 6443 - 436 96 40
Mail: office@safetynet365.com
Web: www.safetynet365.com

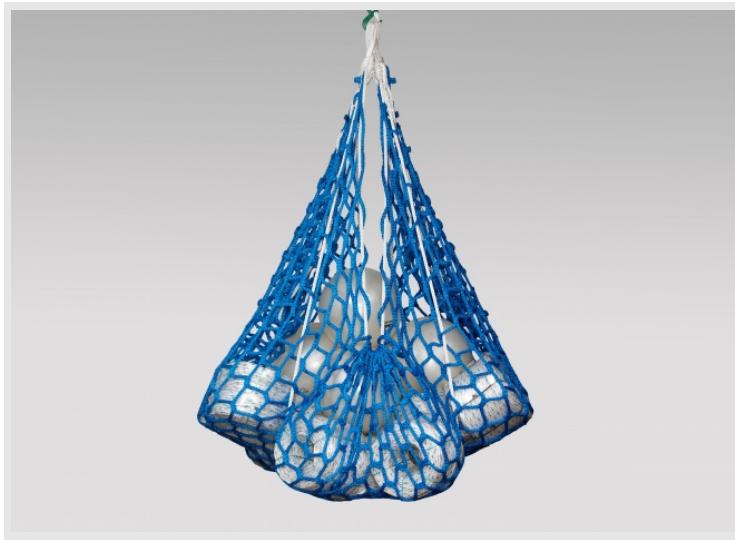

TECHNICAL DATA

Available Colors	blue
Dimensions	3.30 x 3.30 m
Material	high tenacity polypropylene, knotless
Material Diameter	Ø 15.0 mm
Mesh Size	130 x 130 mm
Pose of Meshes	rhombic (diamond mesh)
Mesh Connection	knotless braid
Edge Design	with edged rope, with two cross ropes through the net (PA Ø 14 mm), incl. loops with scuff protection on the corners
Edged Rope	nylon rope (Ø 14 mm, white), all around
Max. Tensile Strength of a Mesh	8300 N
Breaking Elongation of Filament	15%
Payload	3 tons
Standards and Rules	EN 1263-1
Certificate	Oeko-Tex® certificate 12.0.02466
Continuous Operating Temperature	-40 to +80 °C
Melting Point	165 °C
Washing Temperature (max.)	30 °C
Yarn Moisture Regain	0%
Tensile Strength Reduction Because Of Moisture	0%
Resistance to Weak/Strong Acids	very good/good
Resistance to Weak/Strong Alkalies	good/not good
Resistance to Organic Solvents	good
Resistance to Benzine and Greases	very good

Bending Strength & Abrasion Resistance	good
Weather-Resistance	good
UV-Resistance	300 kly
Tensile Strength After Two Years of Climatic Influences	90%
Elasticity After Years of Climatic Influences	good long-term flexibility, little elongation
Flexibility When Used in Water	stays flexible
Contraction When Used in Water	low contraction
Contraction When Used Outside	no contraction
Behavior in High Heat / Fire	melting
Electrical Characteristics	isolating, no electrical conductivity
Customs Tariff No.	56081930
Area Density	1150 g/m ²
Total Weight	15.70 kg