


Product Data Sheet Item No. 7668-06

Air-Permeable Cargo Cover Sheet 2.70 x 3.50 m

Schutznetze24 GmbH
Weyerberg 5, DE-35614 Aßlar-Berghausen
Phone: +49 (0) 6443 - 436 96 40
Mail: office@safetynet365.com
Web: www.safetynet365.com

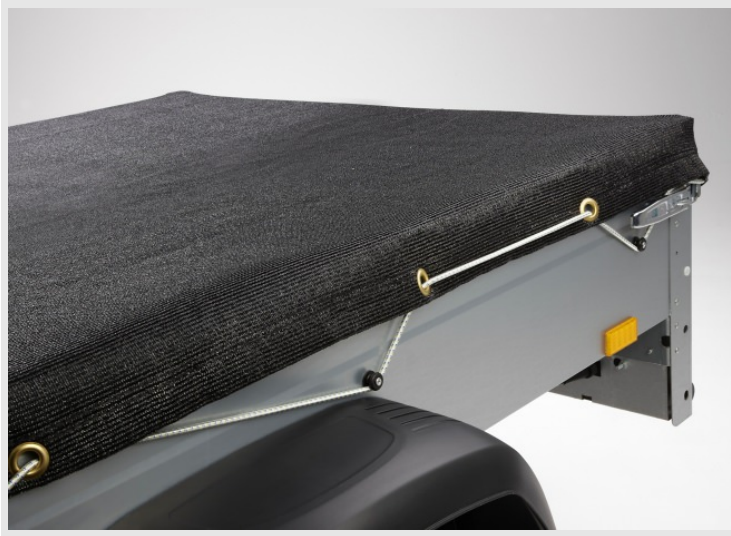

TECHNICAL DATA

| | |
|--|---|
| Available Colors | black |
| Dimensions | 2.70 x 3.50 m |
| Material | polyethylene |
| Type of Textile | closemesh fabric panels, air and water permeable |
| Mesh Size | 1 x 3 mm |
| Shading | 50% |
| Edge Design | with reinforced and stitched edges all around (approx. 40 mm wide) |
| Eyelets | inside diameter Ø 16 mm, all around, with chosen spacing (standard every 50 cm) |
| Shock Cord | incl. pulled in shock cord, Ø 6 mm |
| Breaking Force | 60 daN (according to DIN 53 857/1, average lengthways) |
| Breaking Elongation of Filament | 15% |
| Standards and Rules | VDI standard 2700 |
| Certificate | Oeko-Tex®; certificate 12.0.02466 |
| Continuous Operating Temperature | -30 to +60 °C |
| Melting Point | 155 °C |
| Yarn Moisture Regain | 0% |
| Tensile Strength Reduction Because Of Moisture | 0% |
| Resistance to Weak/Strong Acids | very good/good |
| Resistance to Weak/Strong Alkalis | good/good |
| Resistance to Organic Solvents | good |
| Resistance to Benzine and Greases | very good |
| Bending Strength & Abrasion Resistance | good |
| Weather-Resistance | good |
| UV-Resistance | 250 kly |

| | |
|--|---|
| Tensile Strength After Two Years of Climatic Influences | 90% |
| Elasticity After Years of Climatic Influences | good long-term flexibility, no elongation |
| Flexibility When Used in Water | stays flexible |
| Contraction When Used in Water | low contraction |
| Contraction When Used Outside | low contraction |
| Behavior in High Heat / Fire | melting |
| Electrical Characteristics | isolating, no electrical conductivity |
| Customs Tariff No. | 63079010 |
| Area Density | 240 g/m ² |
| Total Weight | 3.45 kg |