


# Product Data Sheet Item No. 59800-150-4

## Belt Strap Cargo Net 1525 x 4825 mm - Complete Set

Schutznetze24 GmbH  
 Weyerberg 5, DE-35614 Aßlar-Berghausen  
 Phone: +49 (0) 6443 - 436 96 40  
 Mail: office@safetynet365.com  
 Web: www.safetynet365.com

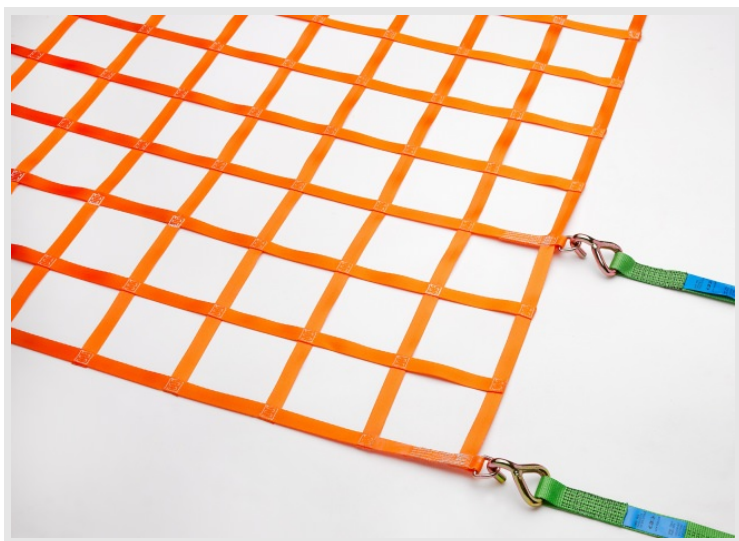

### TECHNICAL DATA

Available Colors	orange
Dimensions	1525 x 4825 mm
Material	polyester
Strap Width	25 mm
Mesh Size	150 x 150 mm
Mesh Connection	seamed
Edge Design	with D rings
Eyelets	steel D rings (inner diameter approx. 30x35 mm, 6 mm strong), in webbing loop, adds in total approx. 60 mm
Permissible Tensile Force	800 daN (lashing point), 1300 daN (net total with 6 tension belts), 2300 daN (net total with 8 tension belts)
Breaking Elongation of Filament	10%
Standards and Rules	EN 12195-2, VDI standard 2700
Certificate	GS verification certificate
Continuous Operating Temperature	-40 to +100 °C
Melting Point	260 °C
Washing Temperature (max.)	90 °C
Yarn Moisture Regain	0.5 to 2.0%
Tensile Strength Reduction Because Of Moisture	0%
Resistance to Weak/Strong Acids	good/not good
Resistance to Weak/Strong Alkalis	good/good
Resistance to Organic Solvents	good
Resistance to Benzine and Greases	good
Bending Strength & Abrasion Resistance	good

<b>Tensile Strength After Two Years of Climatic Influences</b>	90%
<b>Elasticity After Years of Climatic Influences</b>	good long-term flexibility, little elongation
<b>Flexibility When Used in Water</b>	stays flexible
<b>Contraction When Used in Water</b>	low contraction
<b>Contraction When Used Outside</b>	no contraction
<b>Behavior in High Heat / Fire</b>	melting
<b>Electrical Characteristics</b>	isolating, no electrical conductivity
<b>Included Parts</b>	cargo net incl. 6 or 8 tension belts (two-piece load restraint assembly, max. tensile force: 1000 daN, length: 2.00 m)
<b>Customs Tariff No.</b>	63079010
<b>Total Weight</b>	6.50 kg