


# Product Data Sheet Item No. 3008-060GSV

## Guardrail Net 2.00 x 10.00 m with Quick-Release Straps

Schutznetze24 GmbH  
Weyerberg 5, DE-35614 Aßlar-Berghausen  
Phone: +49 (0) 6443 - 436 96 40  
Mail: office@safetynet365.com  
Web: www.safetynet365.com

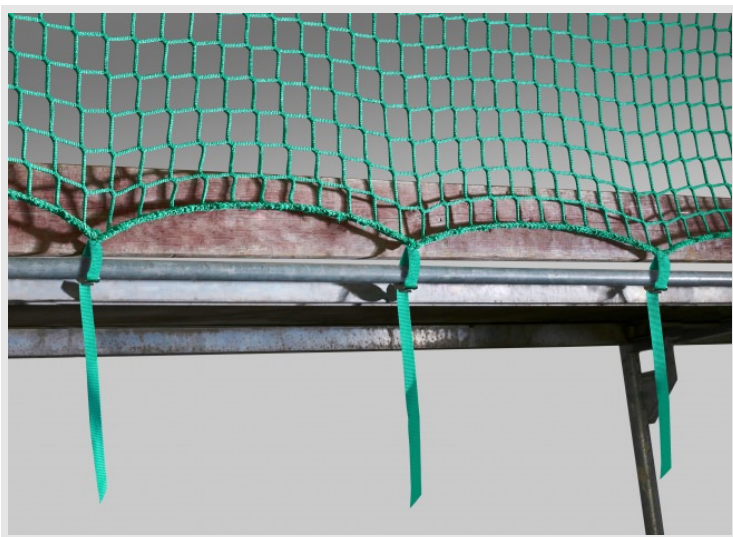

### TECHNICAL DATA

Available Colors	green, blue, fastest availability
Dimensions	2.00 x 10.00 m
Material	high tenacity polypropylene, knotless
Material Diameter	Ø 5.0 mm
Mesh Size	60 x 60 mm
Pose of Meshes	quadratic (square)
Mesh Connection	knotless braid
Edge Design	reinforced selvage cord of approx. 9 mm, with integral surround rope and sewn straps with self locking buckle (at an interval of 75 cm max., length approx. 55 cm)
Max. Tensile Strength of a Mesh	3200 N
Energy Absorption (approx.)	6.1 kJ
Tensile Strength of Buckle Straps	breaking load when used as restraint according to EN 12195-2: 5000 N
Tensile Breaking Force Referred to Density	7.0 cN/den
Breaking Elongation of Filament	15%
Standards and Rules	BG regulation no. 179, DGUV information 101-011, DGUV information 201-023, EN 1263-1
Certificate	DGUV Eurotest verification certificate 24100006, Oeko-Tex&reg; certificate 12.0.02466
Net Class	A1
Safety Net System	U (safety net in load-bearing construction for vertical use)
Regular Inspection Interval	12 months
Number of Test Meshes	3 pcs.
Continuous Operating Temperature	-40 to +80 °C
Melting Point	165 °C
Washing Temperature (max.)	30 °C
Yarn Moisture Regain	0%

<b>Tensile Strength Reduction Because Of Moisture</b>	0%
<b>Resistance to Weak/Strong Acids</b>	very good/good
<b>Resistance to Weak/Strong Alkalis</b>	good/not good
<b>Resistance to Organic Solvents</b>	good
<b>Resistance to Benzine and Greases</b>	very good
<b>Bending Strength &amp; Abrasion Resistance</b>	good
<b>Weather-Resistance</b>	good
<b>UV-Resistance</b>	300 kly
<b>Tensile Strength After Two Years of Climatic Influences</b>	90%
<b>Elasticity After Years of Climatic Influences</b>	good long-term flexibility, little elongation
<b>Flexibility When Used in Water</b>	stays flexible
<b>Contraction When Used in Water</b>	low contraction
<b>Contraction When Used Outside</b>	no contraction
<b>Behavior in High Heat / Fire</b>	melting
<b>Electrical Characteristics</b>	isolating, no electrical conductivity
<b>Customs Tariff No.</b>	56081930
<b>Area Density</b>	350 g/m <sup>2</sup>
<b>Total Weight</b>	5.40 kg