
Product Data Sheet Item No. 4618-300

Custom-Made Climbing Net with Aluminium Knots

Schutznetze24 GmbH Weyerberg 5, DE-35614 Aßlar-Berghausen Phone: +49 (0) 6443 - 436 96 40 Maii: office@safetynet365.com Web: www.safetynet365.com





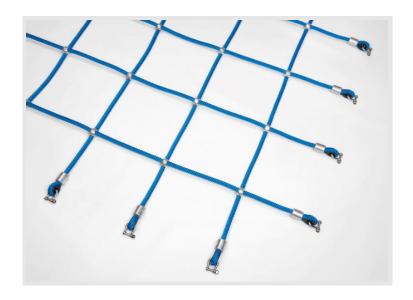



| TECHNICAL DATA | |
|---|--|
| Available Colors | blue, green, black, red, beige (hemp colored) |
| Material | hercules rope Ø 18 mm (6-strand, covered with polyester, twisted), cut resistant |
| Material Diameter | Ø 18.0 mm |
| Mesh Size | 300 x 300 mm |
| Pose of Meshs | quadratic (square) |
| Mesh Connection | aluminium knot system (Ø 35 mm) |
| Edge Design | pressure-grouted or screwed fastening equipment according to choice |
| Breaking Force | minimum breaking force of rope: 42.0 kN, nominal tensile strength: 16 N/mm² |
| Standards and Rules | EN 1176 |
| Continuous Operating Temperature | -40 to +100 °C |
| Melting Point | 260 °C |
| Yarn Moisture Regain | 0.5 to 2.0% |
| Tensile Strength Reduction Because Of Moisture | 0% |
| Resistance to Weak/Strong Acids | good/not good |
| Resistance to Weak/Strong Alkalis | good/good |
| Resistance to Organic Solvents | good |
| Resistance to Benzine and Greases | good |
| Bending Strength & Abrasion Resistance | good |
| Weather-Resistance | good |
| UV-Resistance | 250 kly |
| Tensile Strength After Two Years of Climatic Influences | 90% |
| Electrical Characteristics | isolating coating, electrically conducting core |
| Impregnation | acrylic resin polymer dispersion |
| Customs Tariff No. | 95069990 |