


Product Data Sheet Item No. 59800K-320-3
Belt Strap Cargo Net 1525 x 3025 mm -
Complete Set

Schutznetze24 GmbH
 Weyerberg 5, DE-35614 Aßlar-Berghausen
 Phone: +49 (0) 6443 - 436 96 40
 Mail: office@safetynet365.com
 Web: www.safetynet365.com

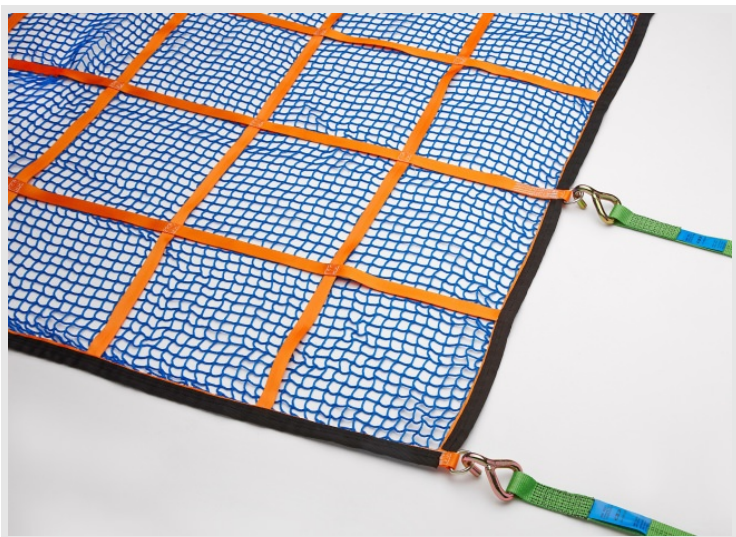

TECHNICAL DATA

| | |
|---|---|
| Available Colors | orange |
| Dimensions | 1525 x 3025 mm |
| Material | high tenacity polypropylene, knotless, polyester |
| Material Diameter | Ø 2.3 mm (cover net) |
| Strap Width | 25 mm |
| Mesh Size | 20 x 20 mm, 300 x 300 mm |
| Pose of Meshs | quadratic (square) |
| Mesh Connection | seamed |
| Edge Design | with edged polyester tape (approx. 25 mm wide), with D rings |
| Eyelets | D rings out of steel, directly sewn to the strap |
| Permissible Tensile Force | 800 daN (lashing point), 1300 daN (net total with 6 tension belts), 2300 daN (net total with 8 tension belts) |
| Breaking Elongation of Filament | 10% |
| Standards and Rules | EN 12195-2, VDI standard 2700 |
| Certificate | GS verification certificate |
| Continuous Operating Temperature | -40 to +80 °C |
| Melting Point | 165 °C |
| Washing Temperature (max.) | 30 °C |
| Yarn Moisture Regain | 0% |
| Tensile Strength Reduction Because Of Moisture | 0% |
| Resistance to Weak/Strong Acids | very good/good |
| Resistance to Weak/Strong Alkalis | good/hot good |
| Resistance to Organic Solvents | good |
| Resistance to Benzine and Greases | very good |

| | |
|--|--|
| Bending Strength & Abrasion Resistance | good |
| Tensile Strength After Two Years of Climatic Influences | 90% |
| Elasticity After Years of Climatic Influences | good long-term flexibility, little elongation |
| Flexibility When Used in Water | stays flexible |
| Contraction When Used in Water | low contraction |
| Contraction When Used Outside | no contraction |
| Behavior in High Heat / Fire | melting |
| Electrical Characteristics | isolating, no electrical conductivity |
| Included Parts | cargo net incl. 6 or 8 tension belts (two-piece load restraint assembly, max. tensile force: 1000 daN, length: 2.00 m) |
| Customs Tariff No. | 63079010 |
| Total Weight | 5.10 kg |