


Product Data Sheet Item No. 7618-06

Air-Permeable Cargo Cover Sheet 1.50 x 2.70 m

Schutznetze24 GmbH
Weyerberg 5, DE-35614 Alßlar-Berghausen
Phone: +49 (0) 6443 - 436 96 40
Mail: office@safetynet365.com
Web: www.safetynet365.com

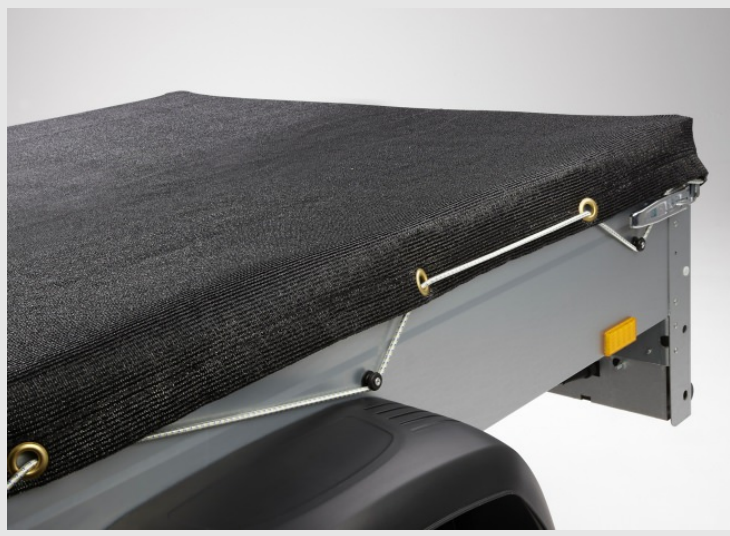

TECHNICAL DATA

Available Colors	black
Dimensions	1.50 x 2.70 m
Material	polyethylene
Type of Textile	closemesh fabric panels, air and water permeable
Mesh Size	1 x 3 mm
Shading	50%
Edge Design	with reinforced and stitched edges all around (approx. 40 mm wide)
Eyelets	inside diameter Ø 16 mm, all around, with chosen spacing (standard every 50 cm)
Shock Cord	incl. pulled in shock cord, Ø 6 mm
Breaking Force	60 daN (according to DIN 53 857/1, average lengthways)
Breaking Elongation of Filament	15%
Standards and Rules	VDI standard 2700
Certificate	Oeko-Tex®; certificate 12.0.02466
Continuous Operating Temperature	-30 to +60 °C
Melting Point	155 °C
Yarn Moisture Regain	0%
Tensile Strength Reduction Because Of Moisture	0%
Resistance to Weak/Strong Acids	very good/good
Resistance to Weak/Strong Alkalis	good/good
Resistance to Organic Solvents	good
Resistance to Benzine and Greases	very good
Bending Strength & Abrasion Resistance	good
Weather-Resistance	good
UV-Resistance	250 kly

Tensile Strength After Two Years of Climatic Influences	90%
Elasticity After Years of Climatic Influences	good long-term flexibility, no elongation
Flexibility When Used in Water	stays flexible
Contraction When Used in Water	low contraction
Contraction When Used Outside	low contraction
Behavior in High Heat / Fire	melting
Electrical Characteristics	isolating, no electrical conductivity
Customs Tariff No.	63079010
Area Density	240 g/m ²
Total Weight	2.00 kg