


Product Data Sheet Item No. 204F008

Safety Net, flame-retardant (no-climb)

Schutznetze24 GmbH
Weyerberg 5, DE-35614 Aßlar-Berghausen
Phone: +49 (0) 6443 - 436 96 40
Mail: office@safetynet365.com
Web: www.safetynet365.com

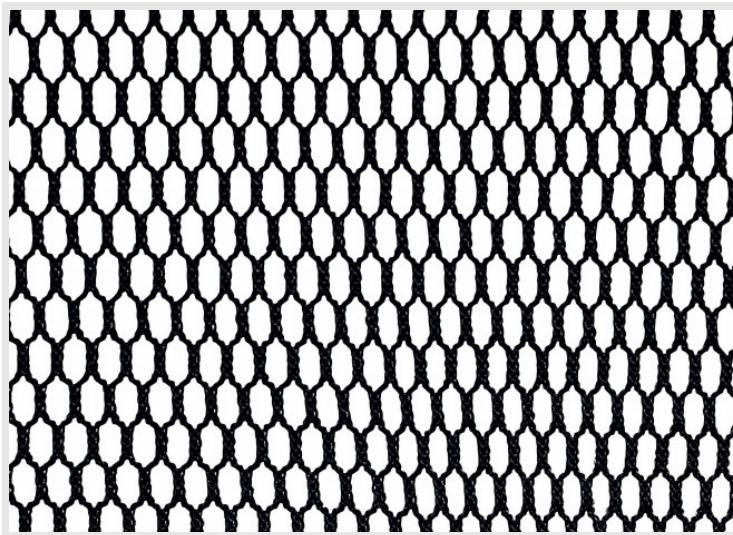

TECHNICAL DATA

Available Colors	black
Material	polyester, knotless, flame-retardant
Material Diameter	Ø 1.8 mm
Mesh Size	8 x 8 mm
Pose of Meshes	hexagonal
Edge Design	without edge
Max. Tensile Strength of a Mesh	270 N
Tensile Breaking Force Referred to Density	7.0 cN/den
Breaking Elongation of Filament	10%
Standards and Rules	EN 13501-1 (flame-retarding), classification B-s1 d2, DIN 4102 (B1, flame-retarding)
Certificate	MPA-Bau certification report P-NDS04-851
Continuous Operating Temperature	-40 to +100 °C
Melting Point	260 °C
Washing Temperature (max.)	90 °C
Yarn Moisture Regain	0.5 to 2.0%
Tensile Strength Reduction Because Of Moisture	0%
Resistance to Weak/Strong Acids	good/not good
Resistance to Weak/Strong Alkalies	good/good
Resistance to Organic Solvents	good
Resistance to Benzine and Greases	good
Bending Strength & Abrasion Resistance	good
Weather-Resistance	good
UV-Resistance	250 kly
Tensile Strength After Two Years of Climatic Influences	90%

Elasticity After Years of Climatic Influences	good long-term flexibility, little elongation
Flexibility When Used in Water	stays flexible
Contraction When Used in Water	low contraction
Contraction When Used Outside	no contraction
Behavior in High Heat / Fire	melting
Electrical Characteristics	isolating, no electrical conductivity
Customs Tariff No.	56081930
Area Density	260 g/m ²