


# Product Data Sheet Item No. 18041-100

## Fall Safety Net 6.00 x 10.00 m (Diagonal Meshes)

Schutznetze24 GmbH  
Weyerberg 5, DE-35614 Aßlar-Berghausen  
Phone: +49 (0) 6443 - 436 96 40  
Mail: [office@safetynet365.com](mailto:office@safetynet365.com)  
Web: [www.safetynet365.com](http://www.safetynet365.com)

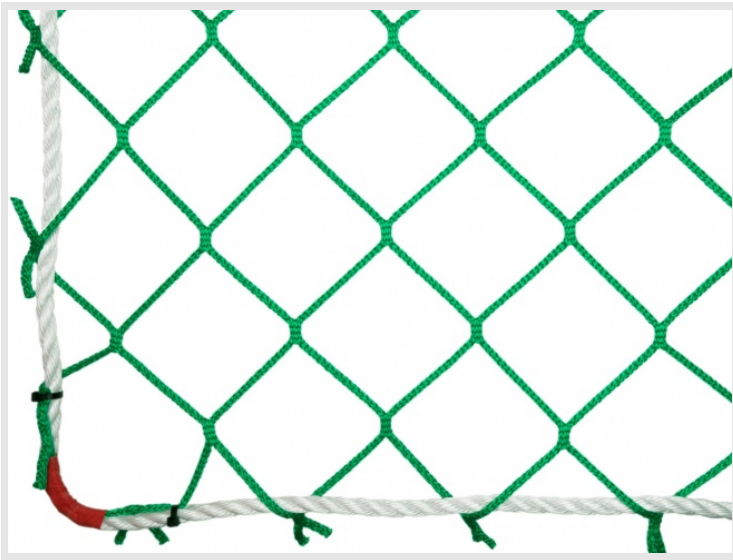

### TECHNICAL DATA

Available Colors	green
Dimensions	6.00 x 10.00 m
Material	high tenacity polypropylene, knotless
Material Diameter	Ø 4.75 mm
Mesh Size	100 x 100 mm
Pose of Meshes	rhombic (diamond mesh)
Mesh Connection	knotless braid
Edge Design	with edged rope
Edged Rope	polysteel rope (Ø 12 mm, white), all around
Max. Tensile Strength of a Mesh	3000 N
Energy Absorption (approx.)	5.0 kJ
Tensile Strength of Edged Rope	30 kN
Tensile Breaking Force Referred to Density	7.0 cN/den
Breaking Elongation of Filament	15%
Standards and Rules	BG regulation no. 179, DGUV standard 101-011, EN 1263-1
Certificate	GS verification certificate 23100031, Oeko-Tex®; certificate 12.0.02466
Net Class	A2
Safety Net System	S (rope-edged safety net)
Regular Inspection Interval	12 months
Number of Test Meshes	3 pcs.
Continuous Operating Temperature	-40 to +80 °C
Melting Point	165 °C
Washing Temperature (max.)	30 °C

<b>Yarn Moisture Regain</b>	0%
<b>Tensile Strength Reduction Because Of Moisture</b>	0%
<b>Resistance to Weak/Strong Acids</b>	very good/good
<b>Resistance to Weak/Strong Alkalis</b>	good/not good
<b>Resistance to Organic Solvents</b>	good
<b>Resistance to Benzine and Greases</b>	very good
<b>Bending Strength &amp; Abrasion Resistance</b>	good
<b>Weather-Resistance</b>	good
<b>UV-Resistance</b>	300 kly
<b>Tensile Strength After Two Years of Climatic Influences</b>	90%
<b>Elasticity After Years of Climatic Influences</b>	good long-term flexibility, little elongation
<b>Flexibility When Used in Water</b>	stays flexible
<b>Contraction When Used in Water</b>	low contraction
<b>Contraction When Used Outside</b>	no contraction
<b>Behavior in High Heat / Fire</b>	melting
<b>Electrical Characteristics</b>	isolating, no electrical conductivity
<b>Customs Tariff No.</b>	56081930
<b>Area Density</b>	275 g/m <sup>2</sup>
<b>Total Weight</b>	12.35 kg