


**Product Data Sheet Item No. 59350-150-02**  
**Belt Strap Cargo Net For Cars 1075 x 1975 mm**  
**- Complete Set**

Schutznetze24 GmbH  
Weyerberg 5, DE-35614 Aßlar-Berghausen  
Phone: +49 (0) 6443 - 436 96 40  
Mail: [office@safetynet365.com](mailto:office@safetynet365.com)  
Web: [www.safetynet365.com](http://www.safetynet365.com)

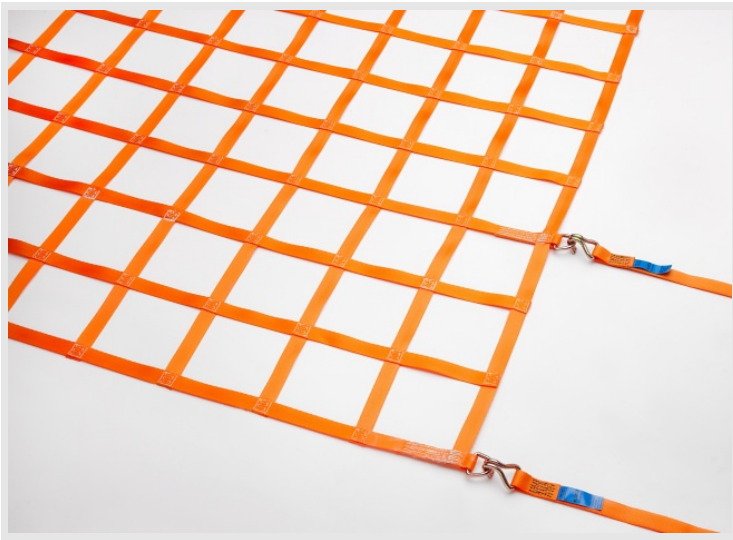

## TECHNICAL DATA

Available Colors	orange
Dimensions	1075 x 1975 mm
Material	polyester
Strap Width	25 mm
Mesh Size	150 x 150 mm
Pose of Meshs	quadratic (square)
Mesh Connection	seamed
Edge Design	with D rings
Eyelets	D rings out of steel, directly sewn to the strap, diameter approx. 55 mm, in webbing loop, adds in total approx. 70 mm
Permissible Tensile Force	350 daN (lashing point), 1300 daN (net total)
Breaking Elongation of Filament	10%
Standards and Rules	EN 12195-2, VDI standard 2700
Continuous Operating Temperature	-40 to +100 °C
Melting Point	260 °C
Washing Temperature (max.)	90 °C
Yarn Moisture Regain	0.5 to 2.0%
Tensile Strength Reduction Because Of Moisture	0%
Resistance to Weak/Strong Acids	good/not good
Resistance to Weak/Strong Alkalies	good/good
Resistance to Organic Solvents	good
Resistance to Benzine and Greases	good
Bending Strength & Abrasion Resistance	good
Tensile Strength After Two Years of Climatic Influences	90%

<b>Elasticity After Years of Climatic Influences</b>	good long-term flexibility, little elongation
<b>Flexibility When Used in Water</b>	stays flexible
<b>Contraction When Used in Water</b>	low contraction
<b>Contraction When Used Outside</b>	no contraction
<b>Behavior in High Heat / Fire</b>	melting
<b>Electrical Characteristics</b>	isolating, no electrical conductivity
<b>Included Parts</b>	cargo net incl. 4 tension belts (one-piece load restraint assembly, max. tensile force: 350 daN, length: 2.00 m)
<b>Customs Tariff No.</b>	63079010
<b>Total Weight</b>	1.85 kg