


# Product Data Sheet Item No. 4618-250

## Custom-Made Climbing Net with Aluminium Knots

Schutznetze24 GmbH  
Weyerberg 5, DE-35614 Aßlar-Berghausen  
Phone: +49 (0) 6443 - 436 96 40  
Mail: office@safetynet365.com  
Web: www.safetynet365.com

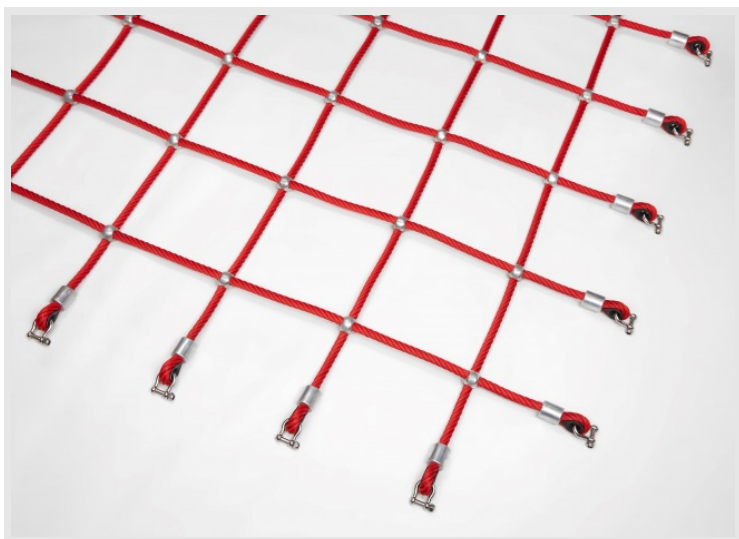

### TECHNICAL DATA

Available Colors	red, green, blue, black, beige (hemp colored)
Material	hercules rope Ø 18 mm (6-strand, covered with polyester, twisted), cut resistant
Material Diameter	Ø 18.0 mm
Mesh Size	250 x 250 mm
Pose of Meshes	quadratic (square)
Mesh Connection	aluminium knot system (Ø 35 mm)
Edge Design	pressure-grouted or screwed fastening equipment according to choice
Breaking Force	minimum breaking force of rope: 42.0 kN, nominal tensile strength: 16 N/mm <sup>2</sup>
Standards and Rules	EN 1176
Continuous Operating Temperature	-40 to +100 °C
Melting Point	260 °C
Yarn Moisture Regain	0.5 to 2.0%
Tensile Strength Reduction Because Of Moisture	0%
Resistance to Weak/Strong Acids	good/not good
Resistance to Weak/Strong Alkalis	good/good
Resistance to Organic Solvents	good
Resistance to Benzine and Greases	good
Bending Strength & Abrasion Resistance	good
Weather-Resistance	good
UV-Resistance	250 kly
Tensile Strength After Two Years of Climatic Influences	90%
Electrical Characteristics	isolating coating, electrically conducting core
Impregnation	acrylic resin polymer dispersion
Customs Tariff No.	95069990